

TX2.5



connectwell
THE RIGHT CONNECTION


TX2.5: 2.5mm² TEST PLUG

The Test Plugs make contact with the Jumper shaft of Terminal Block. Test adapters can be assembled with spacer to create space between two plugs & making alternate arrangement.

PRODUCT SPECIFICATION

Applicable For	CX2.5, CXG2.5 Series CXDL, CXDLG2.5 Series CXK2.5 Series CXM2.5, CXMG2.5
Application	Testing

PRODUCT DIAGRAM

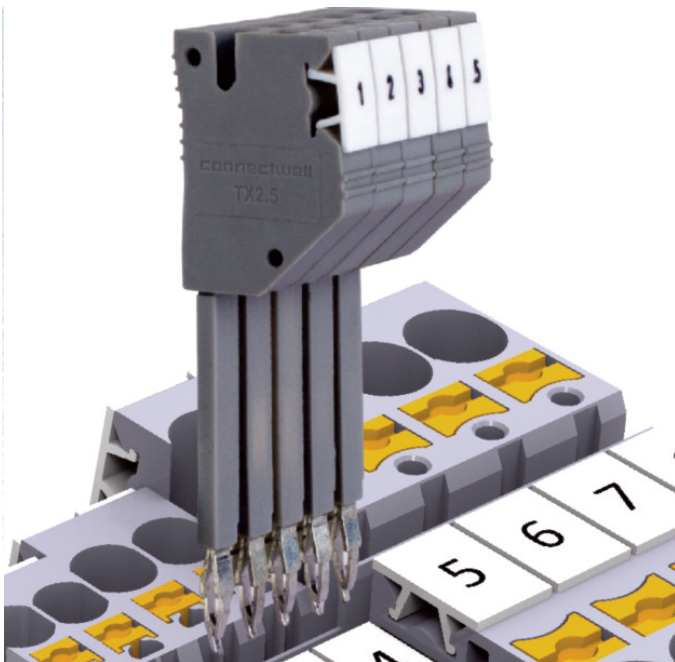

ORDERING INFORMATION

CAT. NO.	DESCRIPTION	STD. PACK
TX2.5	2.5mm ² TEST PLUG	20

SUITABLE FOR

CPDL2.5(E)D1	2.5 sq.mm Terminal Blocks with diode circuit - D1 configuration
CPDL2.5(E)D2	2.5 sq.mm Terminal Blocks with diode circuit - D2 configuration
CPDL2.5(E)DD5	2.5 sq.mm Terminal Blocks in push-in connection with diode circuit - DD5 configuration
CPDLG2.5	2.5 sq.mm Double Level Earthing Terminal Blocks.
CXDLG2.5/2B/I.S	pluggable feed through Spring Clamp Ground Terminal Block Internally shorted in Green Yello colour
CP2.5/3	2.5 sq.mm Push In Feed Through compact Terminal Blocks
CPDL2.5(E)DD1	2.5 sq.mm Terminal Blocks in Pushin connection with diode circuit - DD1 configuration
CPDLG2.5(I.S)	2.5 sq.mm Multiple Connection Earthing Terminal Blocks with 4 connection points.
CXDLG2.5/2B	2.5 sq.mm Double Level Ground/Earth Spring Clamp Terminal Blocks
CPDL2.5	2.5 sq.mm Double Level Push in Terminal Blocks
CPDL2.5(E)D3	2.5 sq.mm Terminal Blocks with in Push In Connection with diode circuit - D3 configuration
CPDL2.5(E)DD2	2.5 sq.mm Terminal Blocks in pushin connection with diode circuit - DD2 configuration
CPDL2.5(E)DD3	2.5 sq.mm Terminal Blocks in Push in with diode circuit - DD3 configuration
CPDL2.5(E)DD6	2.5 sq.mm Terminal Blocks in push-in connection with diode circuit - DD6 configuration
CPK2.5	CPK2.5 : 2.5 sq.mm Push in Knife Disconnecting Compact Terminal Blocks
CPDL2.5(E)DD4	2.5 sq.mm Terminal Blocks in push-in connection with diode circuit - DD4 configuration
CPDL2.5(E)LD1	2.5 sq.mm Double Level Terminal Blocks with LED indication for LD1 Configuration
CPDL2.5(E)TS1	2.5 sq.mm Double Level Terminal Blocks with Temperature Sensor indication - TS1 Configuration
CPDL2.5(I.S)	2.5 sq.mm Multiple Connection Internally Shorted Terminal Blocks with 4 connection points.
CX2.5/4/4B	2.5 sq.mm pluggable 4 wire feed through Spring Clamp Terminal Block
CXDL2.5/2B	2.5 sq.mm pluggable feed through Spring Clamp Terminal Block
CXDL2.5/2B/I.S	pluggable feed through Spring Clamp Terminal Block Internally shorted